

## **CARGADORES PARA APARCABICIS DE DOBLE ALTURA EASYLIFT**



Los aparcabicis de doble altura Easylift de VelopA, en sus tres versiones, Premium, CapaCity y DIN500, pueden incorporar, tanto cuando se montan como con posterioridad, estos cargadores especialmente diseñados para el sistema de doble altura.

### **VENTAJAS DE LOS MODELOS DE DOBLE ALTURA**

- ✓ Excelente relación calidad-precio
- ✓ Muy fácil de montar y de utilizar
- ✓ Muy fácil de desmontar y de reciclar
- ✓ Máxima protección contra robos y actos vandálicos
- ✓ Cumple con los estándares de compra sostenible

***Prestaciones de los cargadores para Easylift:***

- Muy fáciles de usar y aptos para los tres modelos de aparcabicis de doble altura de VelopA.
- Llevan toma de corriente IP67, adaptada al mercado español.
- Van recubiertos de pintura verde de larga duración.
- Colocados ergonómicamente para que su uso resulte lo más cómodo posible para el usuario.
- De fácil y rápido montaje tanto en módulos nuevos como en los ya existentes
- Todos los cargadores quedan conectados a la red eléctrica mediante una caja de fusibles, quedando el cable de alimentación bajo la viga para una protección óptima.




***Requisitos:***

- ☞ De momento, son válidos únicamente para interior, si bien se está mejorando el sistema para que pueda instalarse también en exteriores.
- ☞ Pueden instalarse únicamente en los módulos unilaterales.
- ☞ Para evitar accidentes, se instalan únicamente en el piso inferior, debiéndose aparcar las bicis en el piso inferior para su recarga.
- ☞ Certificación CE en proceso.





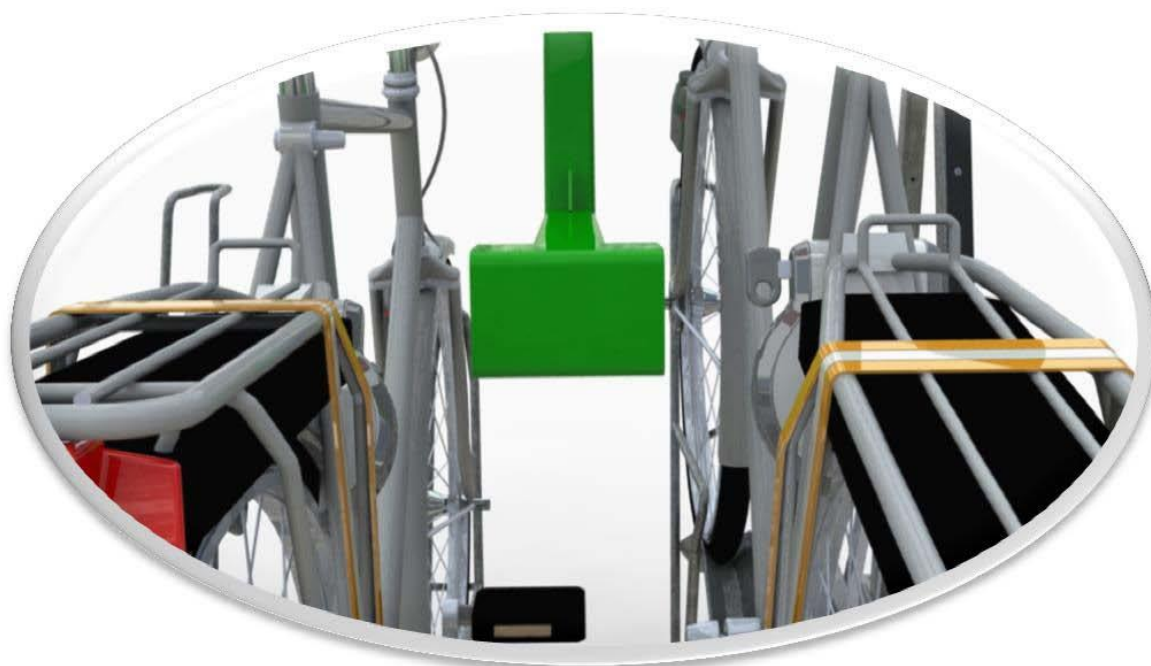

# Mounting instruction Easylift Charging point

MI-98110602

Art.no.

mnienzen

17-1-2018 Rev. ?

www.velopa.com

1/1



Easylift Premium and CapaCITY


| product art.no | Description                       | Color | IP   |
|----------------|-----------------------------------|-------|------|
| 44090900       | Charge unit Netherlands / Germany | Blue  | IP44 |
| 44090902       | Charge unit Begium / France       | Red   | IP44 |
| 44090904       | Charge unit Swiss                 | White | IP44 |

| Center to centre bike park system | Installation Tube lenght | no. tube frame clips/tube |
|-----------------------------------|--------------------------|---------------------------|
| 375 mm                            | ±610 mm                  | 3                         |
| 400 mm                            | ±635 mm                  | 3                         |
| 500 mm                            | ±735 mm                  | 3                         |
| End section                       | ± 1000 mm                | 3                         |

## Warning:

- Only for SINGLE sided bike parking systems
- Only for indoor usage.
- The electrical installation must be connected to a (max) 16A fuse with a residual current device according to prevailing standard and a separate electric group.
- A maximum of 30 charge units (Max 110W) can be connected to the single 16A group.
- All electric copupleings are parallel.
- Connecting the system to the powergrid must be done by a certified electrician.

54800010 - Fabco with collar Ø6,3x25 (10x)



Installation Tube end must be fit on location

Power socked, see table and article number

44002910 - Power cabel Nexans 3x2,5 mm  
Lenght = 1,3x(number of beams x beam size) + (1200mm)

44004150  
Installation Tube

44004130 - Cable saddle

End section installation tube

1x 44003010 Cable box  
2x 54800010 Fabco with collar D=6.3x25

# Schuko-type panel mounting socket outlets




# Schuko-type panel mounting socket outlets with **QUICK CONNECT<sup>®</sup>** VON BALS


- Screwless connection technology
- Robust terminal and housing design
- New, attractive design
- Special contact technology mostly prevents deformation ultimately leading to lessening contact pressure and subsequent higher temperatures
- Captive flange seal
- Available as IP44 or IP54 variant (IP67 available from September 2014)
- Flange dimensions in 50x50 mm and 75x75 mm
- Versions available for German, Swiss, or Belgian/French system
- Also with child-proof safety feature on request
- Special colours on request (depending on quantity)
- VDE-tested
- Finger-proof in accordance with BGV A3
- Nickel plated contacts




The QC version is available in different national standards and colours

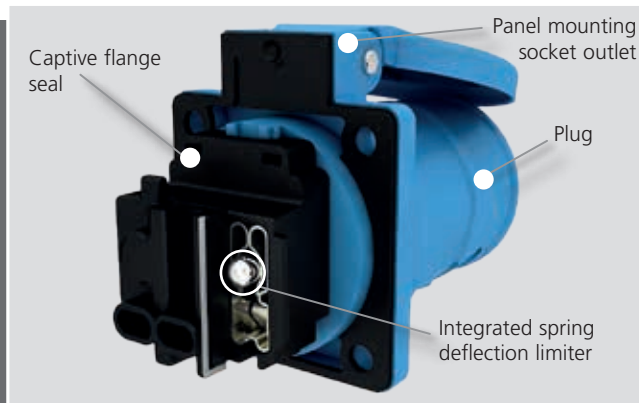


Solid design reduces contact deformation

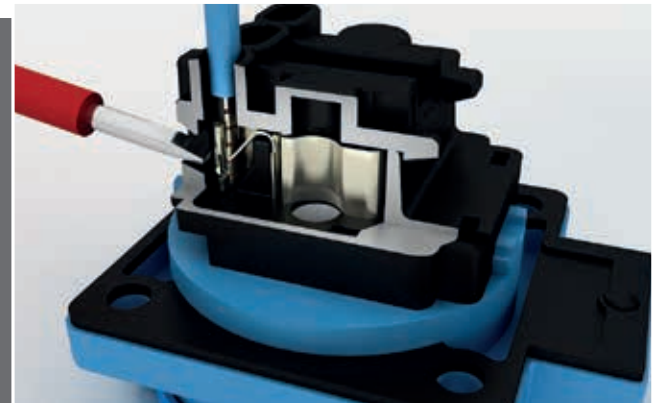

Simple disconnection of the conductor using a screwdriver

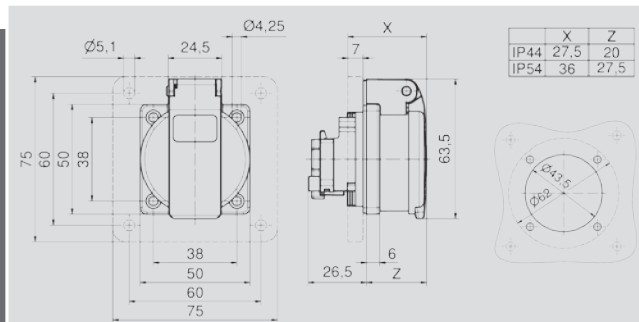

Dimensional drawings

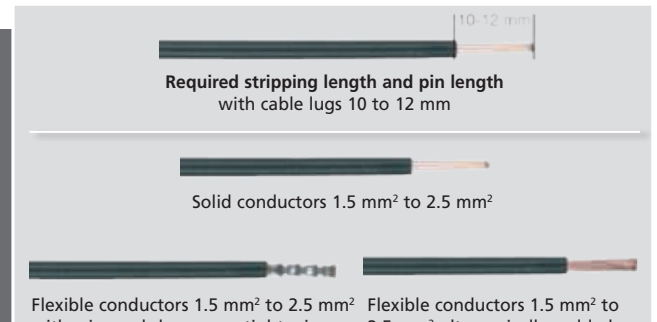

Different conductor types and cross sections can be used

|  |                                                       |  |  |
|--|-------------------------------------------------------|--|--|
|  | <b>Schuko-type panel mounting socket outlet IP 44</b> |  |  |
|  | • Flange 50 x 50 mm                                   |  |  |
|  | • Screwless connection technology                     |  |  |
|  | • With captive flange seal                            |  |  |
|  | <b>Schuko-type panel mounting socket outlet IP 54</b> |  |  |
|  | • Flange 50 x 50 mm                                   |  |  |
|  | • Screwless connection technology                     |  |  |
|  | • With captive flange seal                            |  |  |
|  | <b>Schuko-type panel mounting socket outlet IP 44</b> |  |  |
|  | • Flange 75 x 75 mm                                   |  |  |
|  | • Screwless connection technology                     |  |  |
|  | • With captive flange seal                            |  |  |
|  | <b>Schuko-type panel mounting socket outlet IP 54</b> |  |  |
|  | • Flange 75 x 75 mm                                   |  |  |
|  | • Screwless connection technology                     |  |  |
|  | • With captive flange seal                            |  |  |

\* With child-proof socket outlets, please add -KI to the end of the order number